



TRUMPower

TIPC300-FXG

300W High Efficiency FlexATX IPC Power Supply

FEATURES

- Complies with Flex ATX Standard
- Meets 80PLUS Gold Efficiency Level
- Active PFC meets EN 61000-3-2 Standard
- Remote ON/OFF Function
- 5,000 Meters Operating Altitude
- Approved to IEC/EN/UL 60950-1 2nd Edition Standards

INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC
Input Frequency	47-63Hz
Input Current	4A rms max. @ 115 VAC 2A rms max. @ 230 VAC
Earth Leakage Current	350µA max. @ 264 VAC, 50Hz

OUTPUT SPECIFICATIONS

Output Power Ratings	See rating chart
Load Regulation	See rating chart
Ripple & Noise*	See rating chart
Hold-up Time	12ms min. @ 115VAC, 60Hz 16ms min. @ 230VAC, 50Hz
Rise Time	20ms max. @ 115/230VAC
Over Voltage Protection, +3.3V ..	3.5-4.8V +5V 5.5-7V +12V ... 13.4-16V
Over Current Protection, +3.3V ..	50mV p-p +5V 50mV p-p +12V ... 120mV p-p +5Vsb . 50mV p-p
Short Circuit Protection	On all outputs, Load of less than 0.1 ohm
Temperature Coefficient	±0.04%/°C max.

* Measured with 20MHz bandwidth at rated line voltage and output load ranges, with a 10µF tantalum capacitor in parallel with a 0.1µF ceramic disk capacitor across the output connector.

OUTPUT VOLTAGE & CURRENT RATING CHART				
Output Voltage	Minimum Load	*Maximum Load	Load Regulation	Ripple & Noise VP-P Max.
+3.3V	0.3A	14A	±5%	50mV
+5V	0.3A	16A	±5%	50mV
+12V1	0.5A	16A	±5%	120mV
+12V2	0.5A	16A	±5%	120mV
-12V	0A	0.5A	±10%	120mV
+5Vsb	0A	3A	±5%	50mV

* The overall output power is 300W maximum.
* The total output power for +3.3V & +5V is 100W maximum.




GENERAL SPECIFICATIONS

Efficiency	90% min. @ full load
Operating Altitude	5,000 meters max.
Operating Temperature	0°C to +50°C
Storage Temperature	-20°C to +80°C
Relative Humidity	5% to 95% non-condensing
Withstand Voltage	1,800 VAC, input-ground
MTBF	150K hours minimum at full load & 25°C ambient, calculated per MIL-HDBK-217F

STANDARDS & COMPLIANCES

EMI/EMC	FCC & CISPR 22, Class B conducted FCC & EN 55022, Class B radiated
Safety Standards	UL/IEC/EN 60950-1 2nd Edition
Agency Approvals	UL, cUL, TUV, CB, CE
Other Compliance	80PLUS, RoHS, EuP Lot 6:2013

MECHANICAL SPECIFICATIONS

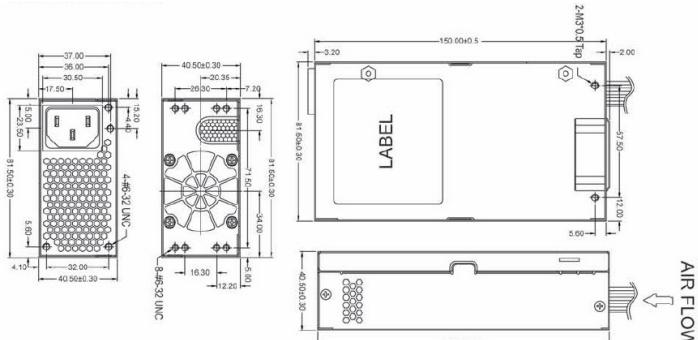

Notes:

1. Dimensions in mm.
2. Customized cable set available upon request.