



FEATURES

- 1U Form Factor
- Meets ATX12V Standard
- 80PLUS Bronze Efficiency Level
- Active PFC meets EN 61000-3-2 Standard
- Remote ON/OFF Function
- Approved to UL/IEC/EN 60950-1 2nd Edition



INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC
Input Frequency	47-63Hz
Input Current	5A rms max. @ 115 VAC 2.5A rms max. @ 230 VAC
Inrush Current	50A @ 115 VAC, 100A @ 230 VAC, at 25°C cold start
Earth Leakage Current	350µA max. @ 264 VAC, 50Hz

OUTPUT SPECIFICATIONS

Output Power Ratings	See rating chart
Load Regulation	See rating chart
Ripple & Noise*	See rating chart
Hold-up Time	17ms min. @ 115/230VAC
Rise Time	20ms max. @ 115/230VAC
Over Voltage Protection, +3.3V ..	3.5-4.8V
+5V	5.5-7V
+12V ...	13.4-16V
Over Current Protection, +3.3V ..	50mV p-p
+5V	50mV p-p
+12V ...	120mV p-p
-12V	120mV p-p
+5Vsb .	50mV p-p
-5V	100mV p-p
Short Circuit Protection	On all outputs, Load of less than 0.1 ohm
Temperature Coefficient	±0.04%/°C max.

* Measured with 20MHz bandwidth at rated line voltage and output load ranges, with a 10µF tantalum capacitor in parallel with a 0.1µF ceramic disk capacitor across the output connector.

OUTPUT VOLTAGE & CURRENT RATING CHART				
Ouput Voltage	Minimum Load	*Maximum Load	Load Regulation	Ripple & Noise VP-P Max.
+3.3V	0.3A	14A	±5%	50mV
+5V	0.3A	16A	±5%	50mV
+12V ₁	0.5A	16A	±5%	120mV
+12V ₂	0.5A	16A	±5%	120mV
-12V	0A	0.5A	±10%	120mV
+5Vsb	0A	3A	±5%	50mV
-5V	0A	0.3A	±10%	100mV

* The overall output power is 300W maximum.
* The total output power for +3.3V & +5V is 120W maximum.


GENERAL SPECIFICATIONS

Efficiency	85% typ. @ full load
Operating Altitude	2,000 meters max.
Operating Temperature	0°C to +50°C
Storage Temperature	-20°C to +80°C
Relative Humidity	5% to 95% non-condensing
Withstand Voltage	1,800 VAC, input-ground
MTBF	150K hours minimum at full load & 25°C ambient, calculated per MIL-HDBK-217F

STANDARDS & COMPLIANCES

EMI/EMC	FCC & CISPR 22, Class B conducted FCC & EN 55022, Class B radiated
Safety Standards	UL/IEC/EN 60950-1 2nd Edition
Agency Approvals	UL, cUL, TUV, CB, CE, CCC
Other Compliance	80PLUS, RoHS

MECHANICAL SPECIFICATIONS

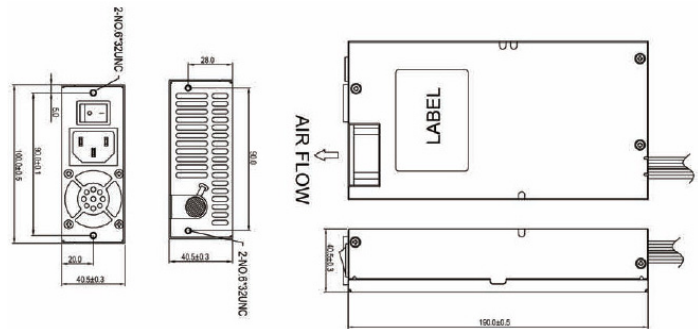

- Notes:
1. Dimensions in mm.
 2. Customized cable set available upon request.