

**FEATURES**

- Complies with Flex ATX Standard
- Meets 80PLUS Efficiency Level
- Active PFC meets EN 61000-3-2 Standard
- Remote ON/OFF Function
- 2,000 Meters Operating Altitude
- Approved to IEC/EN/UL 60950-1 2nd Edition

**INPUT SPECIFICATIONS**

Input Voltage Range .....	90-264 VAC
Input Frequency .....	47-63Hz
Input Current .....	7A rms max. @ 115 VAC
	3.5A rms max. @ 230 VAC
Earth Leakage Current .....	350µA max. @ 264 VAC, 50Hz

**OUTPUT SPECIFICATIONS**

Output Power Ratings .....	See rating chart
Load Regulation .....	See rating chart
Ripple & Noise* .....	See rating chart
Hold-up Time .....	17ms min. @ 115/230VAC
Rise Time .....	20ms max. @ 115/230VAC
Over Voltage Protection, +3.3V ..	3.5-4.3V
	+5V ..... 5.5-7V
	+12V ... 13.4-15.6V
Over Current Protection, +3.3V ..	50mV p-p
	+5V ..... 50mV p-p
	+12V ... 120mV p-p
	-12V .... 120mV p-p
	+5Vsb . 50mV p-p
Temperature Coefficient .....	±0.04%/°C max.

\* Measured with 20MHz bandwidth at rated line voltage and output load ranges, with a 10µF tantalum capacitor in parallel with a 0.1µF ceramic disk capacitor across the output connector.

**OUTPUT VOLTAGE & CURRENT RATING CHART**

Output Voltage	Minimum Load	*Maximum Load	Load Regulation	Ripple & Noise VP-P Max.
+3.3V	0.1A	16A	±5%	50mV
+5V	0.3A	19A	±5%	50mV
+12V <sub>1</sub>	1A	16A	±5%	120mV
+12V <sub>2</sub>	1A	16A	±5%	120mV
-12V	0A	0.3A	±10%	120mV
+5Vsb	0A	2A	±5%	50mV

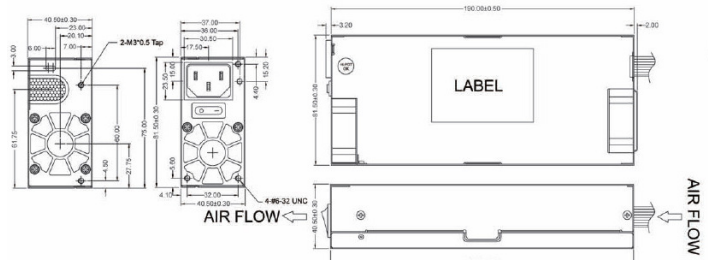
\* The overall output power is 350W maximum.  
 \* The total output power for +3.3V & +5V is 105W maximum.  
 \* The total output current for +12V<sub>1</sub> & +12V<sub>2</sub> is 25A maximum.

**GENERAL SPECIFICATIONS**

Efficiency .....	80% min. @ full load
Operating Altitude .....	2,000 meters max.
Operating Temperature .....	0°C to +50°C
Storage Temperature .....	-20°C to +80°C
Relative Humidity .....	5% to 95% non-condensing
Withstand Voltage .....	1,800 VAC, input-ground
MTBF .....	150K hours minimum at full load & 25°C ambient, calculated per MIL-HDBK-217F

**STANDARDS & COMPLIANCES**

EMI/EMC .....	FCC & CISPR 22, Class B conducted FCC & EN 55022, Class B radiated
Safety Standards .....	UL/IEC/EN 60950-1 2nd Edition
Agency Approvals .....	UL, cUL, TUV, CB, CE, CCC
Other Compliance .....	80PLUS, RoHS, EuP Lot 6:2013

**MECHANICAL SPECIFICATIONS**

- Notes:  
 1. Dimensions in mm.  
 2. Customized cable set available upon request.